

LICENSABLE
INTELLECTUAL
PROPERTY
FOR FPGA, ASIC OR
ASSP DESIGNS

40/
100G
Ethernet MAC
and PCS + RS-FEC

APPLICATIONS

- Data Centers
- Smart NIC
- Low-Latency Switches
- QoS-Based Packet Processing
- Test and Monitoring Equipment
- Backhaul Solution
- Video over IP

ULTRA-LOW LATENCY, HIGH-SPEED, FLEXIBILITY AND SCALABILITY.

The 40/100G Ethernet MAC & PCS + RS-FEC is a multi-rate IP core supporting 40G and 100G line rate. The core is designed using advanced design techniques leading to unmatched ultra-low gate count utilization and great latency performances. It includes a rich set of standard and advanced features making it ideal for a large number of applications.

The IP core can support full wire line speed with a 64-byte packet length. It also supports back-to-back or mixed length traffic, up to jumbo frame size, with no dropped packets.

The core includes Reed Solomon FEC RS(528, 514, 10) with FEC bypass and error correction bypass capabilities. Two other versions of the IP core are also available, each supporting a single rate, i.e. 40Gbps or 100Gbps (with RS-FEC).

GENERAL FEATURES

Compliant with IEEE802.3-2015 standard

Ethernet MAC supports 40GbE and 100GbE line rate with flexible feature set


Soft PCS logic interfacing to standard serial transceiver at 10.3125Gbps and 25.78125Gbps

40/ 100G

Ethernet MAC
and PCS + RS-FEC

Free 30-day
evaluation
license

HIGH-LEVEL BLOCK DIAGRAM

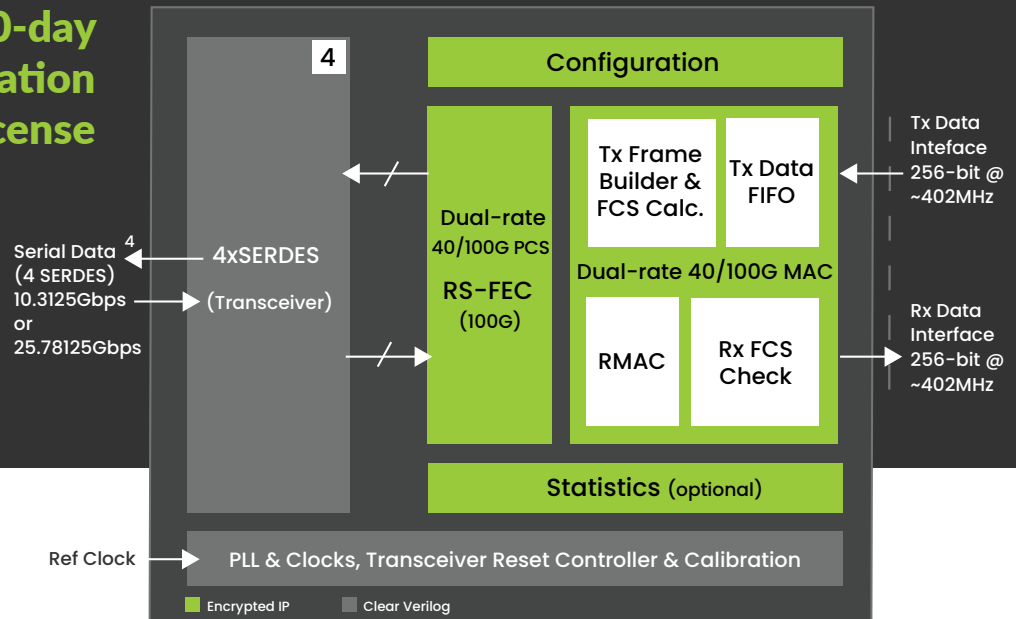

KEY BENEFITS

- Industry leading performances
- Ultra-low gate count
- Ultra-low latency
- Ease of use
- Flexibility & scalability
- Supports wide range of FPGA devices
- High timing margin

MAC FEATURES

- Deficit idle counter (DIC) to maintain a 12-byte inter-packet gap (IPG) average
- Programmable IPG length
- Programmable Maximum Receive Unit (MRU), Maximum Transmission Unit
- User facing logic interface 256-bit @ ~402.8MHz
- Ethernet flow control and congestion management using pause frames with programmable quanta
- Programmable Tx minimum packet length with enable/disable padding option
- Programmable Rx minimum packet length
- Tx Frame Check Sequence (FCS) computation and insertion
- Programmable Tx FCS pass-through and corruption insertion modes
- Programmable keep/strip Rx FCS
- Programmable Rx FCS error detection and marking
- Programmable Tx and Rx large frame threshold detection
- Programmable Tx and Rx path VLAN detection (Programmable TPID, stacked VLAN)
- Programmable Rx frame discard & marking
- Configurable statistics vector and collector on transmit and receive MAC data

PCS FEATURES

- Supports 40GBASE-R and 100GBASE-R PHY based on 64B/66B encoding with data striping and alignment markers to align data from multiple lanes
- Supports block synchronization and BER monitor
- Supports multiple lanes swapping, lane alignment and deskew
- Configurable statistics vector and collector on transmit and receive PCS

40/ 100G

Ethernet MAC
and PCS + RS-FEC

PRODUCT BRIEF

DELIVERABLES

- Datasheet & user guide
- Encrypted Verilog
- Constraints file
- Reference design
- Technical support
- Optional IP design customization

RS-FEC FEATURES

- Built-In Reed Solomon FEC RS(528, 514, 10) with FEC bypass and error correction bypass capabilities
- Statistics information for RS-FEC decoder (FEC align status, corrected & uncorrected FEC codewords)

PERFORMANCES OVERVIEW

MULTI-RATE 40/100G MAC & PCS + RS-FEC

Device Family ⁽¹⁾	Rate [Gbps]	Resources Utilization ⁽²⁾			Core clock [MHz]	Wire to Wire Round-Trip Latency ⁽³⁾
		LUTs	FFs	BRAM		
UltraScale +	40-Gbps	44.2k	43.6k	21	~ 402MHz	315 ns
UltraScale +	100-Gbps (RS-FEC Off)					196 ns
UltraScale +	100-Gbps (RS-FEC On)					399 ns

(1) Other FPGA platforms are also supported. Performances provided for mid speed grade (-2).

(2) Resources utilization includes statistics counters

(3) Latency: Transceiver + PCS + MAC (Tx + Rx)

Contact us for the performance of other product variants

**ORDERING
INFORMATION**
ENET-100G-R-02
(40/100G + RS-FEC)

sales@orthogone.com
514.316.1917 x777

